




Type designation

Overview

20120824 / Wa

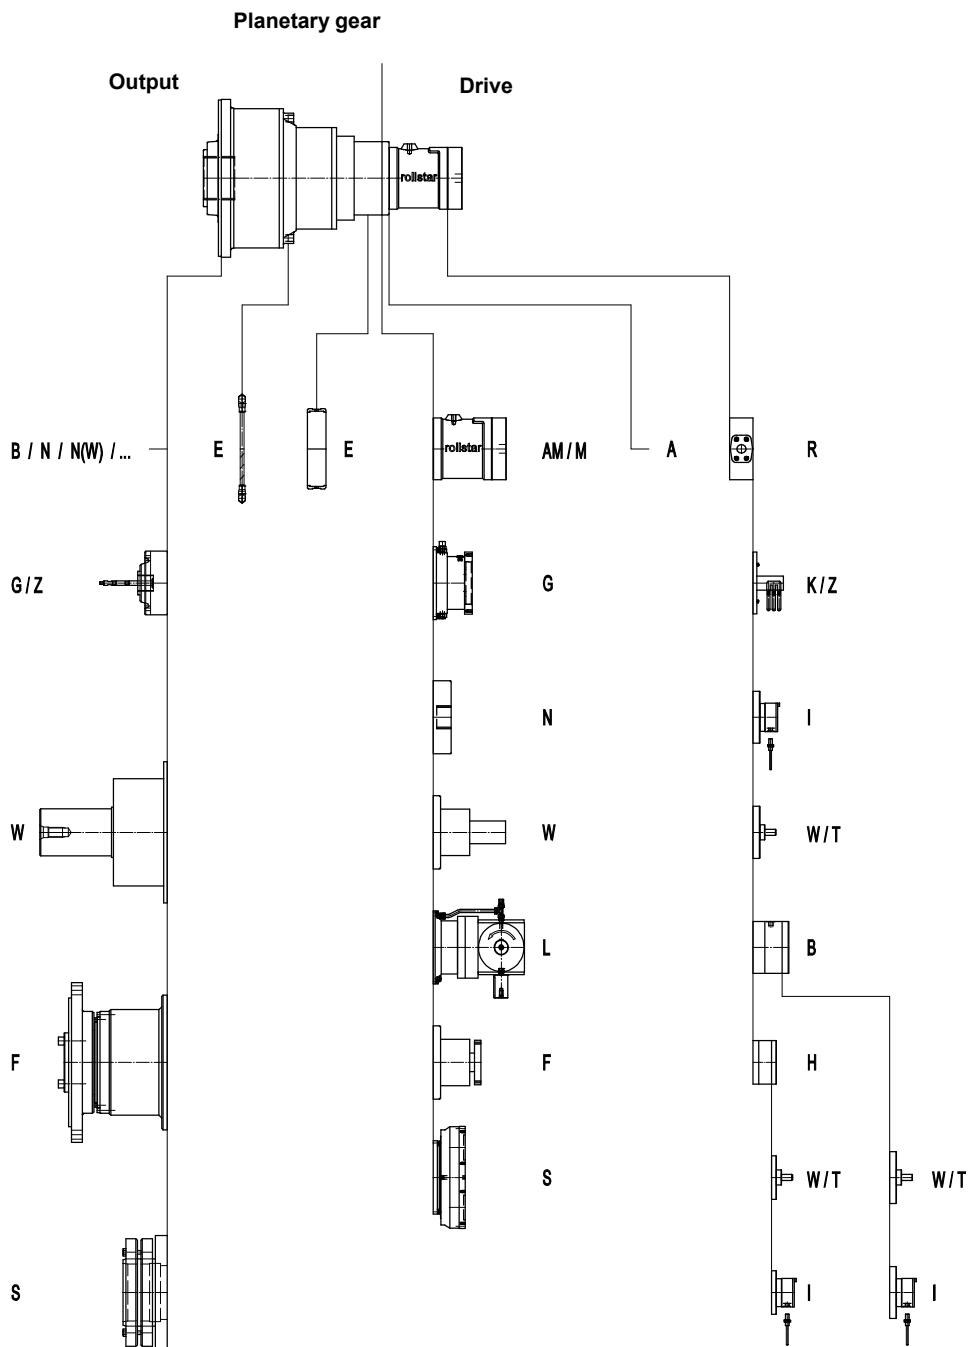


General	
A	Sealed between motor and gear
D	Hollow shaft, continuous
E	Special design: E.g. cooling, oil level indicator etc.
F	Flange
FV	Flange, reinforced
W	Shaft
WV	Shaft reinforced
WP	Shaft feather key
WVP	Shaft feather key reinforced
WZ	Shaft toothed
WVZ	Shaft toothed reinforced

Drive specific	
AM / M	Hydraulic motor Rollstar Type AM, Type M
B	Brake
G	Mounting foreign motor
H	Return stop
I	Impulse generator incl. Case
K / Z	Manual or hydraulic gear shift
L	Mounting angular gear
N	Hub
NP	Hub feather key
NZ	Hub toothed
R	Oil hook-up radial Oil hook-up axial
S	Mounting spur gear / pick-off gear
T	Second shaft end for tachogenerator

Output specific	
B	Special fastening flange
G / Z	Manual or hydraulic gear shift
N	Hub special design, suitable for shaft
N(W)	fastening
S	Shrink disc coupling


Coding sample part no.

11BI34.41.69BE

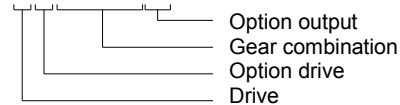

Coding sample type

AM110BI-51.42 BE

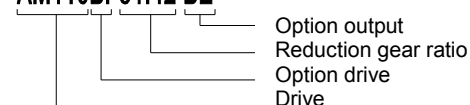

Specification according catalogue